



# TECHNICAL DATA SHEET

## ADJUSTABLE FLASHING • AF

Used to seal the space between the chimney and the roof. Specify the roof slope when ordering.

**Includes:**

1 Storm collar (SC)

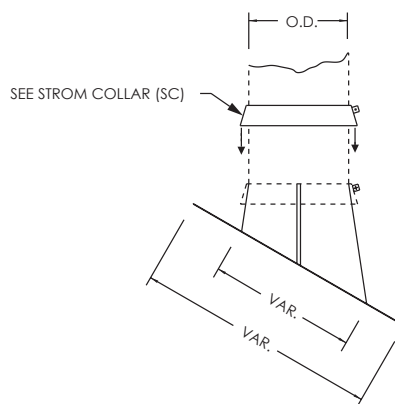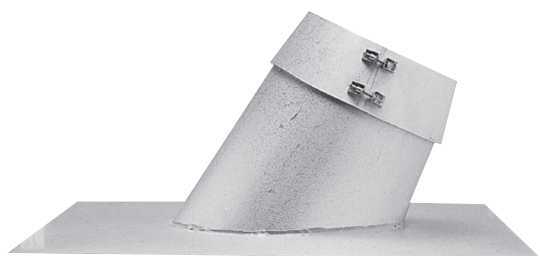

**AVAILABLE FOR MODELS:**

**IPPL/IPPL2/IPPL2F/IPPL4F**

**HEPL/HEPL2**

**GDPL/GDPL2F/GDPL4F**