

# TECHNICAL DATA SHEET


## ANCHOR PLATE • AP

Used to support the chimney in vertical runs. It is attached to the floor by means of anchors (not included). It is designed to be supported on four (4) sides. Structural angles may be used to support sides that are unsupported.

**Includes:**

- 1 Assembly band (AB)
- 1 Finishing band (FB)

K = Same as pipe length

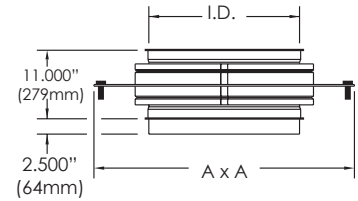

DOUBLE WALL - 2"			
I.D.		A	
in	mm	in	mm
6	152	22.000	559
8	203	24.000	610
10	254	26.000	660
12	305	28.000	711
14	356	30.000	762
16	406	32.000	813
18	457	34.000	864
20	508	36.000	914
22	559	38.000	965
24	610	40.000	1016
26	660	42.000	1068
28	711	44.000	1118
30	762	46.000	1168
32	813	48.000	1219
34	864	50.000	1270
36	914	52.000	1321
38	965	54.000	1372
40	1016	56.000	1422
42	1067	58.000	1473
44	1118	60.000	1524
46	1168	62.000	1575
48	1219	64.000	1626

DOUBLE WALL - 4"			
I.D.		A	
in	mm	in	mm
6	152	26.000	660
8	203	28.000	711
10	254	30.000	764
12	305	32.000	813
14	356	34.000	864
16	406	36.000	914
18	457	38.000	965
20	508	40.000	1016
22	559	42.000	1068
24	610	44.000	1118
26	660	46.000	1168
28	711	48.000	1219
30	762	50.000	1270
32	813	52.000	1321
34	864	54.000	1372
36	914	56.000	1422
38	965	58.000	1473
40	1016	60.000	1524
42	1067	62.000	1575
44	1118	64.000	1626
46	1168	66.000	1676
48	1219	68.000	1727

**AVAILABLE FOR MODELS:**

**IPPL/IPPL2/IPPL2F/IPPL4F**

**HEPL/HEPL2**

**GDPL/GDPL2F/GDPL4F**