
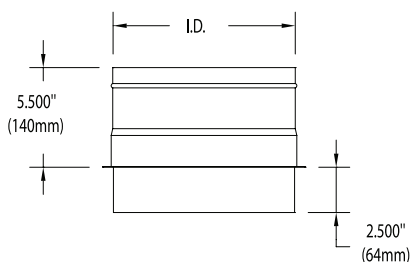


# TECHNICAL DATA SHEET


## CLOSURE SECTION • CS

Installed at the top of the chimney. It protects the chimney against water infiltration in the insulation between the inner and outer wall of the chimney. Installation of a drain-tee cap (DC) or a drain section (DS) at the base of the chimney is required for use of a closure section.

### SINGLE WALL



### DOUBLE WALL - 2\"/>

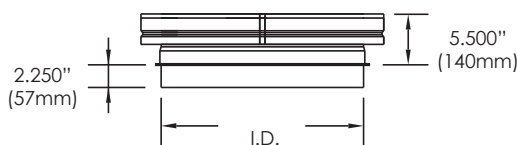

**AVAILABLE FOR MODELS:**

**IPP/IPPL/IPPL2/IPPL2F/IPPL4F**

**HEP/HEPL/HEPL2**

**GDP/GDPL/GDPL2F/GDPL4F**