

# TECHNICAL DATA SHEET


## 30° ELBOW • E30

Used to offset the flue or chimney by 30°.

**Includes:**

- 1 Assembly band (AB)
- 1 Finishing band (FB)

K = 0.12

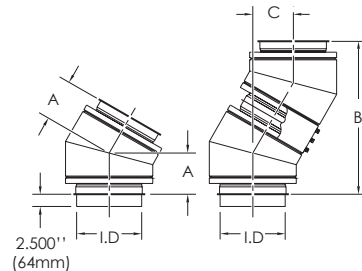

DOUBLE WALL - 2"							
I.D.		A		B		C	
in	mm	in	mm	in	mm	in	mm
6	152	7.304	186	27.258	692	7.304	186
8	203	7.572	192	28.258	718	7.527	192
10	254	7.894	199	29.258	743	7.840	199
12	305	8.108	206	30.258	769	8.108	206
14	356	8.376	213	31.258	794	8.376	213
16	406	8.644	220	32.258	819	8.644	220
18	457	8.912	226	33.258	845	8.912	226
20	508	9.179	233	34.258	870	9.179	226
22	559	9.447	240	35.258	896	9.447	240
24	610	9.715	247	36.258	921	9.715	247
26	660	9.983	254	37.258	946	9.983	254
28	711	10.251	260	38.258	972	10.251	260
30	762	10.519	267	39.258	997	10.519	267
32	813	10.787	274	40.258	1023	10.787	274
34	864	11.055	281	41.258	1048	11.055	281
36	914	11.323	288	42.258	1073	11.323	288
38	965	11.591	294	43.258	1099	11.591	294
40	1016	11.859	301	44.258	1124	11.859	301
42	1067	12.127	308	45.258	1150	12.127	308
44	1118	12.395	315	46.258	1175	12.395	315
46	1168	12.663	322	47.258	1200	12.663	322
48	1219	12.931	328	48.258	1226	12.931	328

DOUBLE WALL - 4"							
I.D.		A		B		C	
in	mm	in	mm	in	mm	in	mm
6	152	27.485	698	8.743	222	8.304	211
8	203	30.314	770	9.157	233	8.527	218
10	254	33.142	842	9.571	243	8.840	225
12	305	35.971	914	9.985	254	9.108	231
14	356	38.799	985	10.399	264	9.376	238
16	406	41.627	1057	10.814	275	9.644	245
18	457	44.456	1129	11.228	285	9.912	252
20	508	47.284	1201	11.642	296	10.179	259
22	559	50.113	1273	12.056	306	10.447	265
24	610	52.941	1345	12.471	317	10.715	272
26	660	55.770	1417	12.885	327	10.983	279
28	711	58.598	1488	13.299	338	11.251	286
30	762	61.426	1560	13.713	348	11.519	293
32	813	64.255	1632	14.127	359	11.787	299
34	864	67.083	1704	14.542	369	12.055	306
36	914	69.912	1776	14.956	380	12.323	313
38	965	72.740	1848	15.370	390	12.591	320
40	1016	75.569	1919	15.784	401	12.859	327
42	1067	78.397	1991	16.198	411	13.127	333
44	1118	81.225	2063	16.613	422	13.395	340
46	1168	84.054	2135	17.027	432	13.663	347
48	1219	86.882	2207	17.441	443	13.931	354

AVAILABLE FOR MODELS:

IPPL/IPPL2/IPPL2F/IPPL4F

HEPL/HEPL2

GDPL/GDPL2F/GDPL4F