


TECHNICAL DATA SHEET

ROOF SUPPORT • RS

Used to support and guide the portion of the chimney which extends to the roof. It is attached to the roof curb by means of four (4) angles. It keeps a minimum distance between the chimney and combustible materials at the roof.

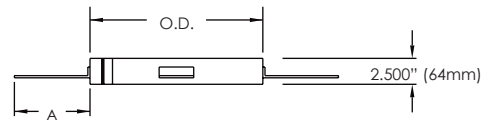

SINGLE WALL			
I.D.		A	
in	mm	in	mm
6'' to 14''	152 to 356	5.250	133
16'' to 22''	406 to 559	7.250	184
24''	610	9.250	235

DOUBLE WALL - 2''		DOUBLE WALL - 4''		A	
I.D.		I.D.			
in	mm	in	mm	in	mm
6'' to 14''	152 to 356	6'' to 10''	152 to 254	5.250	133
16'' to 22''	406 to 559	12'' to 18''	305 to 457	7.250	184
24'' to 32''	610 to 813	20'' to 28''	508 to 711	9.250	235
34'' to 42''	965 to 1067	30'' to 38''	792 to 965	11.250	286
44'' to 48''	1118 to 1219	40'' to 48''	1016 to 1219	13.250	337

AVAILABLE FOR MODELS:

IPP/IPPL/IPPL2/IPPL2F/IPPL4F

HEP/HEPL/HEPL2

GDP/GDPL/GDPL2F/GDPL4F